Product Catalog



XU YUAN PACKAGING TECHNOLOGY CO., LTD.













ABOUT US

旭源包裝科技股份有限公司為專業的套標籤機、貼標機及彩色收縮標籤積層袋印刷之先驅。為服務國內及國外之企業界，除提供完善之設計技術服務、各類優質軟、硬體等產品的銷售服務及維修，亦提供相關行業解決方案、委外等服務。

旭源包裝科技股份有限公司研發目標為持續不斷以「人性自動化機械設備的開發及朝向最佳化的綠色產業邁進」，研發團隊並以多年累積的環保原料應用知識，配合創新製程技術，期以耗用最少的地球資源，以最清潔生產製程、高經濟效益產出量能，達到「節能」、「減廢」、「永續」的環境保護價值。

我們不斷投注無盡的努力與心血，讓自己得以一天天逐步前進，我們期盼能贏得您的持續支持，這正是讓我們繼續邁進的主要動力。

XU-YUAN Packaging Technology Co., Ltd. is a professional pioneer in shrinkable label inserting machines, labeling machines, and colorful art-laminated bags. Not only do we provide extensive service of design, technical, after-sales repair and maintenance of hardware and software for businesses in Taiwan and overseas, but also offer solutions and outsourcing packages for related industries.

"Develop user-friendly automatic machinery and make efforts in becoming an optimized Green Company" is the R&D goal of XU-YUAN Packaging Technology Co., Ltd. which we are always trying to achieve. The XYP R&D team has experienced knowledge in applied environmental protection raw materials, and innovative skills of manufacturing process. We look forward using lowest cost of the Earth resources by the cleanest manufacturing process and high economic benefits of capacity to reach the environmental protection value of "save energy", "reduce waste", and "sustainability".

We continuously make efforts so that XYP is gradually making progress day by day. We expect that we can win your sustained support in the future, and this is exactly our main motivation to push us keep advancing.

總經理
President

INDEX

全自動立式套標籤機系列
Automatic Shrinkable Label Inserting Machine
XYLB- 100..... 2
XYLB- 300..... 3
XYL- 100..... 4
XYL- 250S..... 5
XYL- 250L..... 6
XYL- 450S..... 7
XYL- 450L..... 8
XYLC- 600..... 10
XYL- 600S..... 12
XYL- 800..... 13
XYL- 1200..... 14

專業瓶蓋套標機
Professional Cap Seal Sleever
XYC- 300/600..... 15

蒸氣式 & 電熱式收縮爐系列
Steam and Heat Shrink Tunnel List..... 16

吹乾機．捲料機．自動放杯器．自動收杯器
Others
Dryer Machine Sleeve Reel System
Cup Dispenser
Cup Accumulating Device..... 19

彩色印刷收縮膜標籤系列
Shrinkable Colorful Label..... 20

彩藝-積層袋
Colorful Art-Laminated Bags..... 22

本公司基於研究改進之必要，因此保有外觀尺寸規格等修改之權利。
All specification and design characteristics shown in this catalogue are subject to change without notice.

XYLB- 100

Automatic Shrinkable
Label Inserting Machine

全自動立式自動套標籤機



機械特性

1. 外觀採不鏽鋼結構設計與壓克力安全防護門。
2. 人性化設計操作及設定由觸控面板操控。
3. 同步調整結構式設計，簡易操作。
4. 改機更換不同產品只需數分鐘時間即可完成。
5. 簡易式快速換料機構、節省時間及安全性。
6. 單驅動輪雙挾持將利於標籤傳送更加穩定。
7. 可搭配各式產品，增添選配式模組可節省客戶成本。

Features

1. Machine constructed by stainless steel. Comply with acrylic safety protection door.
2. Operation settings are controlled by the touch panel in close to user-friendly.
3. Synchronous adjustment structure design makes easy operation.
4. Only few minutes change over time to fit different size of container.
5. Simple & quick structure of label unwinds for time saving and inreasing the safety.
6. Single driving wheel and double clamping will facilitate label transfer more stable.
7. To meet various products, adding optional modules can save customer costs.

電源 Power source:	3P/ 220V~ 415V
生產速度 Production rate:	100 BPM (標籤長度100，label length 100 mm)
瓶罐直徑 Range of bottle diameter:	Ø25 ~ Ø125
套標長度 Label insertion length:	35 mm ~ 180 mm
標籤厚度 Range of label thickness:	0.035 ~ 0.08 mm
膜料材質 Material:	PVC，PET，OPS
總功率 Total Power:	2.5 KW
主機機械尺寸 Machine dimensions (L x W x H):	900 x 1000 x 1850 mm

XYLB- 300

Automatic Shrinkable Label Inserting Machine

全自動立式自動套標籤機



機械特性

1. 外觀採不鏽鋼結構設計與壓克力安全防護門。
2. 人性化設計操作及設定由觸控面板操控。
3. 同步調整結構式設計，簡易操作。
4. 改機更換不同產品只需數分鐘時間即可完成。
5. 簡易式快速換料機構、節省時間及安全性。
6. 單驅動輪雙挾持將利於標籤傳送更加穩定。
7. 可搭配各式產品，增添選配式模組可節省客戶成本。

Features

1. Machine constructed by stainless steel. Comply with acrylic safety protection door.
2. Operation settings are controlled by the touch panel in close to user-friendly.
3. Synchronous adjustment structure design makes easy operation.
4. Only few minutes change over time to fit different size of container.
5. Simple & quick structure of label unwinds for time saving and inreasing the safety.
6. Single driving wheel and double clamping will facilitate label transfer more stable.
7. To meet various products, adding optional modules can save customer costs.

電源 Power source:	3P/ 220V~ 415V
生產速度 Production rate:	300 BPM (標籤長度100，label length 100 mm)
瓶罐直徑 Range of bottle diameter:	Ø25 ~ Ø125
套標長度 Label insertion length:	25 mm ~ 300 mm
標籤厚度 Range of label thickness:	0.035 ~ 0.08 mm
膜料材質 Material:	PVC, PET, OPS
總功率 Total Power:	4 KW
主機機械尺寸 Machine dimensions (L x W x H):	980 x 1190 x 2020 mm

XYL- 100

Automatic Shrinkable
Label Inserting Machine

全自動立式自動套標籤機



機械特性

1. 全覆式防護外罩設計，符合安全操作規範。
2. 機械設計採用模組化設計，拆裝更換方便迅速。
3. 所有調整機構，採用同步調整設計，操作容易，不需專業人員即可操作。
4. 簡易式快速換料機構，節省時間及安全 。
5. 全功能人機介面操作模式。
6. 可搭配各式產品，並依客戶實際需求，增添其他附屬機構完成套標需求。

Features

1. Overall coverage frame to meet safety operation regulation.
2. Modular designed for quick change over.
3. Synchronous adjustment design makes machine to be easier operation without professional technician.
4. Simple & quick structure of label unwinds for time saving and ensure safety.
5. Interface touch controller for easy adjustment.
6. To meet customize inserting requirement by offering various accessory with the machine.

電源 Power source:	3P/ 220V~ 415V
生產速度 Production rate:	100 BPM (標籤長度100, label length 100 mm)
瓶罐直徑 Range of bottle diameter:	Ø25 ~ Ø125
套標長度 Label insertion length:	25 mm ~ 180 mm
標籤厚度 Range of label thickness:	0.035 ~ 0.08 mm
膜料材質 Material:	PVC, PET, OPS
總功率 Total Power:	2.5 KW
主機機械尺寸 Machine dimensions (L x W x H):	900 x 980 x 1850 mm

XYL-250S

Automatic Shrinkable Label Inserting Machine

全自動立式自動套標籤機



機械特性

1. 獨特豪華亮麗外觀造型，採用不銹鋼包覆設計，符合機械設計規範，單一機體安裝方便。
2. 機械設計採用模組化設計，拆裝更換方便迅速。
3. 所有調整模組，採用連動式設計，操作簡便，調整迅速。
4. 驅動系統使用精密齒輪設計，穩定的傳動速度，可達到標籤長度 ±1mm 公差要求。
5. 使用超音波電眼感應送料，配合彈簧張力控制系統，確保膜料輸送更穩定。
6. 使用大螢幕人機介面操控設計，更為貼近人性化機械操控方式。
7. 機台設計可依據套標長度設計，標長可至 300mm 以上。

Features

1. Machine constructed by stainless steel with especially and luxurious appearance. Conform to safety regulation. Single machine structure ensures convenient installation.
2. Modular design for quick change over.
3. All adjustable modular design by transmission type for easy operation and fast adjustment.
4. The accurate gear wheel design for driver system to stable the transmition speed and limit the label height within (+/-) 1mm tolerance.
5. Using supersonic sensor to detect sleeve and with spring tension controller system for ensuring the feeding sleeve steady.
6. The interface with large screen touch controller for user-friendly operation.
7. Machine design can fit the label height up to 300mm and above.

電源 Power source:	3P / 220V ~ 415V
生產速度 Production rate:	250 BPM (標籤長度180, label length 180 mm)
瓶罐直徑 Range of bottle diameter:	Ø25 ~ Ø125
套標長度 Label insertion length:	25 mm ~ 220 mm
標籤厚度 Range of label thickness:	0.035 ~ 0.08 mm
膜料材質 Material:	PVC, PET, OPS
總功率 Total Power:	4 KW
主機機械尺寸 Machine dimensions (L x W x H):	1190 x 980 x 2100 mm

XYL- 250L

Automatic Shrinkable
Label Inserting Machine

全自動立式自動套標籤機



機械特性

1. 全機外觀採不銹鋼包覆式設計，符合機械設計規範，單一機體安裝方便。
2. 機械結構採用模組化設計，拆裝更換，方便迅速。
3. 人機介面控制系統，更貼近人性化操作。
4. 更換產品規格快速、方便，僅需簡單調整。
5. 落地式雙料架系統，可輕鬆安全的更換膜料。
6. 快速接料系統設計，不需停機接料，可提高生產效率。
7. 機台設計可依據套標長度設計，標長可至 300mm 以上。

Features

1. Machine constructed by stainless steel. Comply with safetyregulation. Single machine structure ensures convenient installation.
2. Modular design for quick changeover.
3. Interface touch controller for user-friendly operation.
4. Only need minor adjustment to fit different inserting container.
5. Ground sleeve reel system bring the safe and easy way of changing reel.
6. High speed splicing system enables reel change without stop the machine. Improve line productivity.
7. Machine design can fit the label height up to 300mm and above.

電源 Power source:	3P / 220V ~ 415V
生產速度 Production rate:	250 BPM (標籤長度180, label length 180 mm)
瓶罐直徑 Range of bottle diameter:	Ø25 ~ Ø125
套標長度 Label insertion length:	25 mm ~ 220 mm
標籤厚度 Range of label thickness:	0.035 ~ 0.08 mm
膜料材質 Material:	PVC, PET, OPS
總功率 Total Power:	4 KW
主機機械尺寸 Machine dimensions (L x W x H):	1190 x 980 x 2100 mm

XYL-450S

Automatic Shrinkable Label Inserting Machine

全自動立式自動套標籤機



機械特性

1. 獨特豪華亮麗外觀造型，採用不銹鋼包覆設計，符合機械設計規範，單一機體安裝方便。
2. 機械設計採用模組化設計，拆裝更換方便迅速。
3. 所有調整模組，採用連動式設計，操作簡便，調整迅速。
4. 驅動系統使用精密齒輪設計，穩定的傳動速度，可達到標籤長度 ±1mm 公差要求。
5. 使用超音波電眼感應送料，配合彈簧張力控制系統，確保膜料輸送更穩定。
6. 使用大螢幕彩色人機介面操控設計，更為貼近人性化機械操控方式。
7. 機台設計可依據套標長度設計，標長可至 300mm 以上。

Features

1. Machine constructed by stainless steel with especially and luxurious appearance. Conform to safety regulation. Single machine structure ensures convenient installation.
2. Modular design for quick changeover.
3. All adjustable modular parts require simple operation and minor adjustment.
4. The accurate gear wheel design for driver system to stable the transmition speed and limit the label height within (+/-) 1mm tolerance.
5. Using supersonic sensor to detect sleeve with spring tension controller system to ensure feeding sleeve steady.
6. Colorful interface touch controller for friendly user operation.
7. Machine design can fit the label height up to 300mm and above.

電源 Power source:	3P / 220V ~ 415V
生產速度 Production rate:	450 BPM (標籤長度180, label length 180 mm)
瓶罐直徑 Range of bottle diameter:	Ø25 ~ Ø125
套標長度 Label insertion length:	25 mm ~ 220 mm
標籤厚度 Range of label thickness:	0.035 ~ 0.08 mm
膜料材質 Material:	PVC, PET, OPS
總功率 Total Power:	5 KW
主機機械尺寸 Machine dimensions (L x W x H):	1190 x 1250 x 2100 mm

XYL- 450L

Automatic Shrinkable
Label Inserting Machine

全自動立式自動套標籤機



機械特性

1. 獨特豪華亮麗外觀造型，採用不銹鋼包覆設計，符合機械設計規範，單一機體安裝方便。
2. 機械設計採用模組化設計，拆裝更換方便迅速。
3. 新型膜料儲料設計，使用精密滾輪傳送，配合滑軌升降機構，可達到每分鐘生產速度 450 瓶，標籤長度 100 mm 長，儲料 1 分鐘時間。
4. 快速接料系統，搭配膜料儲料設計，不需停機接料，提高生產效率。
5. 所有調整模組，採用連動式設計，操作簡便，調整迅速。
6. 驅動系統使用精密齒輪設計，穩定的傳動速度，可達到標籤長度 ±1mm 公差要求。
7. 使用超音波電眼感應送料，配合彈簧張力控制系統，確保膜料輸送更穩定。
8. 使用大螢幕彩色人機介面操控設計，更為貼近人性化機械操控方式。
9. 機台設計可依據套標長度設計，標長可至 300mm 以上。

電源 Power source:
生產速度 Production rate:
瓶罐直徑 Range of bottle diameter:
套標長度 Label insertion length:
標籤厚度 Range of label thickness:
膜料材質 Material:
總功率 Total Power:
主機機械尺寸 Machine dimensions (L x W x H):



Features

1. Machine constructed by stainless steel with especially and luxurious appearance. Conform to safety regulation. Single machine structure ensures convenient installation.
2. Modular design for quick changeover.
3. New accumulating label system use precision roller design with splicing system. One minute accumulating period to achieve the production speed up to 450 bpm on100 mm label height.
4. High speed splicing system enables reel change without machine to stop. Improve line productivity.
5. All adjustable modular parts require simple operation and minor adjustment.
6. The accurate gear wheel design for driver system to stable the transmition speed and limit the label height within (+/-) 1mm tolerance.
7. Using supersonic sensor to detect sleeve with the spring tension controller system to ensure feeding sleeve steady.
8. Colorful interface touch controller for friendly user operation.
9. Machine design can fit the label height up to 300mm and above.

3P / 220V ~ 415V	
450 BPM (標籤長度180, label length 180 mm)	
Ø25 ~ Ø125	
25 mm ~ 220 mm	
0.035 ~ 0.08 mm	
PVC, PET, OPS	
5 KW	
1190 x 1250 x 2100 mm	

XYLC- 600

Automatic Shrinkable
Label Inserting Machine

全自動立式自動套標籤機



機械特性

1. 本機為“單一機體雙套標機頭”的設計，可同時完成瓶頭套標及瓶身套標的設計需求，每分鐘的速度可達 600瓶。
2. 全機採用不銹鋼機體結構，全覆式安全設計，外型豪華亮麗，單一機體安裝方便。
3. 機械設計採用標準化、模組化，維修、拆裝更換方便迅速。
4. 本機採用雙邊供料系統，雙料盤交互供料設計，減低停機換料時間，提高生產效率。
5. 人機介面操作設計，可同時生產，亦可單機生產。
6. 本機可節省整體連線設計空間，只需單一動線，搭配單一收縮爐即可完成套標收縮之需求。
7. 本機採用高性能連動控制控制器，搭配懸臂式人機操作控制，提供簡易高靈敏度操作控制。
8. 本機刀盤及驅動全部採用進口高級伺服控制系統及伺服馬達動作更加穩定精確。
9. 機台設計可依據套標長度設計，標長可至 300mm 以上。

電源 Power source:
生產速度 Production rate:
瓶罐直徑 Range of bottle diameter:
套標長度 Label insertion length:
標籤厚度 Range of label thickness:
膜料材質 Material:
總功率 Total Power:
主機機械尺寸 Machine dimensions (L x W x H):



Features

1. Machine design by "single body structure with double inserting head", conform to cap labeling with body labeling requirements in the meantime by speed 600 bottles per minute.
2. Machine constructed by stainless steel with especially and luxurious appearance. Comply with safety regulation. Single machine structure ensures convenient installation.
3. Standardization and modularity design for change over convenience and quickly during repair and maintenance.
4. Bipartite sleeve supply system with double reel alternating design, to reduce the time of sleeve continuously and improve production efficiency.
5. Interface controller design can operation with production both in the meantime or single-handed.
6. To short with connect production line space design, one production line to collocate with one shrink tunnel can be conformed to production requirement.
7. Colorful interface touch controller has highly sensitive operation by collocate with High Performance motion control system.
8. Knife plate and drive are using high level drive system and server motor for motion with stable and accurately.
9. Machine design can fit the label height up to 300mm and above.

3P / 220V ~ 415V
600 BPM (標籤長度180, label length 180mm)
Ø25 ~ Ø125
25 mm ~ 220 mm
0.035 ~ 0.08 mm
PVC, PET, OPS
32 KW
2600 x 1330 x 2100 mm

XYL- 600S

Automatic Shrinkable
Label Inserting Machine

全自動立式自動套標籤機



機械特性

1. 全機外觀採不銹鋼包覆式設計，符合械設計規範，單一機體安裝方便。
2. 機械結構採用模組化設計，拆裝更換，方便迅速。
3. 人機介面控制系統，更貼近人性化操作。
4. 更換產品規格快速、方便，僅需簡單調整。
5. 本機使用多軸控制設計原理及自動追隨模式，可精確的達到高速套標要求。
6. 膜料供料設計，可依據產線的需求採用不同的供料系統。
7. 機台設計可依據套標長度設計，標長可至 300 mm 上。

Features

1. Machine constructed by stainless steel. Comply with safety regulation. Simplex machine structure ensures convenient installation.
2. Modular desing for quick changover.
3. Interface touch controller for user-friendly operation.
4. To change new product to another, it takes only minor adjustment.
5. Multi-AxisController and synchronous design to reach the high speed accurately.
6. The design is follow to the production line requirments for providing the suitable label feeding system.
7. Machine could be special designed according to label length max to 300mm above.

電源 Power source:	3P/ 220V~ 415V
生產速度 Production rate:	600 BPM (標籤長度180, label length 180 mm)
瓶罐直徑 Range of bottle diameter:	Ø25 ~ Ø130
套標長度 Label insertion length:	35 mm ~ 180 mm
標籤厚度 Range of label thickness:	0.035 ~ 0.08 mm
膜料材質 Material:	PVC, PET, OPS
總功率 Total Power:	12 KW
主機機械尺寸 Machine dimensions (L x W x H):	1190 x 1250 x 2100 mm

XYL- 800

Automatic Shrinkable Label Inserting Machine

全自動立式自動套標籤機



機械特性

1. 本機為"獨創單一套標機頭"，標籤長度 180mm 長，每分鐘可達 800 瓶之套標機型。
2. 全機採用不銹鋼機體結構，全覆式安全設計，外型豪華亮麗，單一機體安裝方便。
3. 機械設計採用標準化、模組化，維修、拆裝更換方便迅速 。
4. 驅動系統使用精密齒輪設計，穩定的傳動速度，可達到標籤長度±1mm公差要求。
5. 使用超音波電眼感應送料，配合彈簧張力控制系統，確保膜料輸送更穩定。
6. 本機調整機構採用精密量表指示設計，於更換產品大小或動線時，可輕鬆準確的調整至所要的設定位置。
7. 膜料更換設計，採用多捲式儲料設計，在高速運轉下，依據標籤的長度，可持續 90 -100 分鐘不需停機換料。
8. 本機採用多軸控制設計原理及自動追隨模式，可精確的達到高速套標需求。
9. 超大彩色人機介面，主控所有操作及控制設定，更貼近人性化。
10. 機台設計可依據套標長度設計，標長可至 300 mm 以上。

Features

1. Machine design with the " Innovated Single Inserting Head" to reach 800bpm on 180mm label height sleeve.
2. Machine constructed by stainless steel with especially and luxurious appearance. Comply with safety regulation. Single machine structure ensures convenient installation.
3. Standardization and modularity design for change over convenience and quickly during repair and maintenance.
4. Driver system with precision gear design, speed stably to reach label height at +/-1mm tolerance.
5. Ultrasonic sensor response with sliding system, collocate with spring tension control system for sleeve more stably.
6. Mechanism adjusts by a precision instrument design, can adjust to the setting location wanted easily and accurately when change the product dimension or product line.
7. Label change design by roll up accumulation system. According to the length of the label, the machine no stop for sleeve continually with 90 -100 minutes during high speed operation.
8. Axles control design as principle and follows the mode automatically to reach the high speed accurately.
9. Greatly colorful interface control panel as master control for all operations and control sets, close to humanization.
10. Machine could be special designed according to label length max to 300mm above.

電源 Power source:	3P/ 220V~ 415V
生產速度 Production rate:	800 BPM (標籤長度180，label length 180 mm)
瓶罐直徑 Range of bottle diameter:	Ø25 ~ Ø130
套標長度 Label insertion length:	25 mm ~ 220 mm
標籤厚度 Range of label thickness:	0.035 ~ 0.08 mm
膜料材質 Material:	PVC, PET, OPS
總功率 Total Power:	15 KW
主機機械尺寸 Machine dimensions (L x W x H):	1700 x 1375 x 2100 mm

XYL- 1200

Automatic Shrinkable
Label Inserting Machine

全自動立式自動套標籤機



機械特性

1. 本機設計滿足72000BPH充填線設計。
2. 單一機體雙套標頭設計，預防單一套標停機，節省產線空間。
3. 全機外觀採不銹鋼包覆式設計，符合機械設計規範，單一機體安裝方便。
4. 機械結構採用模組化設計，拆裝更換，方便迅速。
5. 人機介面控制系統，更貼近人性化操作。
6. 更換產品規格快速、方便，僅需簡單調整。
7. 本機使用多軸控制設計原理及自動追隨模式，可精確的達到高速套標要求。
8. 膜料供料設計，可依據產線的需求採用不同的供料系統。
9. 機台設計可依據套標長度設計，標長可至 300mm。

Features

1. Meeting high speed filling machine requirement 72000BPH.
2. Twin inserting application in single machine structure , can prevent machine brake down and save production line space.
3. Machine constructed by stainless steel. Followed by safety regulation. Simplex machine structure ensures convenient installation.
4. Modular desing for quick changeover.
5. Interface touch controller for user-friendly operation.
6. To change new product to another, it takes only minor adjustment.
7. Using multi-Axis Controller and synchronous design to reach the high speed accurately.
8. Provide the suitable label feeding system to match different production line requirement.
9. Machine design can fit the label height up to 300mm and above.

電源 Power source:	3P/ 220V~ 415V
生產速度 Production rate:	1200 BPM (標籤長度180, label length 180mm)
瓶罐直徑 Range of bottle diameter:	Ø25 ~ Ø130
套標長度 Label insertion length:	25mm ~ 220mm
標籤厚度 Range of label thickness:	0.035mm ~ 0.08mm
膜料材質 Material:	PVC, PET, OPS
總功率 Total Power:	30 KW
主機機械尺寸 Machine dimensions (L x W x H):	2600 x 1430 x 2250 mm

XYC- 300/600

Professional
Cap Seal Sleever

專業瓶蓋套標機



機械特性

1. 全機外觀採不銹鋼包覆式設計，符合機械設計規範，單一機體安裝方便。
2. 機械結構採用模組化設計，拆裝更換，方便迅速。
3. 人機介面控制系統，更貼近人性化操作。
4. 更換產品規格快速，方便，僅需簡單調整。
5. 簡易式快速換料機構、節省時間及安全性。
6. 可依附於貼標機或充填機之後、節省修改整體動線設計空間。
7. 可以輕鬆移動至所需要動線生產。
8. 有CE規格的型號。

Features

1. Machine constructed by stainless steel. Follow by safety regulation. Simplex machine structure ensures convenient installation.
2. Modular design for quick changeover.
3. Interface touch controller for user-friendly operation.
4. Only need minor adjustment to fit different inserting container.
5. Simple & quick structure of label unwinds for time saving and ensure safety.
6. Easy connect to labeling machine or filling machine for saving the production line space .
7. Easy portable to meet whole production line requirement.
8. CE approved.

	XYC- 300	XYC- 600
電源 Power source:	3P/ 220V~ 440V	3P/ 220V~ 440V
生產速度 Production rate:	300 BPM	600 BPM
瓶罐直徑 Range of CAP diameter:	Ø25 ~ Ø50	Ø25 ~ Ø50
套標長度 Label insertion length:	25mm ~ 50mm	25mm ~ 50mm
標籤厚度 Range of label thickness:	0.04mm ~ 0.08mm	0.04mm ~ 0.08mm
膜料材質 Material:	PVC, PET, OPS	PVC, PET, OPS
總功率 Total Power:	3 KW	5KW
主機機械尺寸 Machine dimensions (L x W x H):	660 x 800 x 1250 mm	660 x 800 x 1250 mm

蒸氣式&電熱式收縮爐系列

Steam and Heat Shrink Tunnel List

EHTC- 100 Cap Heat Shrink Tunnel 1米瓶蓋電熱爐

主機機械尺寸 Machine Dimensions... **1060L x 140W x 140H mm**
爐內尺寸 Tunnel Dimensions..... **1000L x 85W x 95H mm**
電源 Power Source ..... **3P / 220V ~ 415V**
加熱器 Heater..... **7.5~8.1 KW** （熱風槍）




EHT- 302 Heat Shrink Tunnel 2米電熱爐

主機機械尺寸 Machine Dimensions... **2000L x 1000W x 2000H mm**
爐內尺寸 Tunnel Dimensions..... **2000L x 160W x 350H mm**
電源 Power Source ..... **3P / 220V ~ 415V**
主機馬力 Main Motor..... **0.75 KW**
加熱器 Heater..... **12 KW**



ST-1200 Steam tunnel 蒸汽爐

主機機械尺寸 Machine Dimension.....**2000L x 500W x 600H mm**
爐內尺寸 Tunnel Dimension.....**2000L x 200W x 350H mm**
電源 Power Source.....**3P / 220V ~ 380V**
鼓風機馬達 Main Motor.....**1 KW**
使用蒸氣壓力 Steam Pressure.....**0.5 ~ 3.5 Kg/cm²**
蒸氣消耗量 Exhausted of steam.....**150-190 Kg/hr**
機械重量 Machine weight.....**About 200kg**

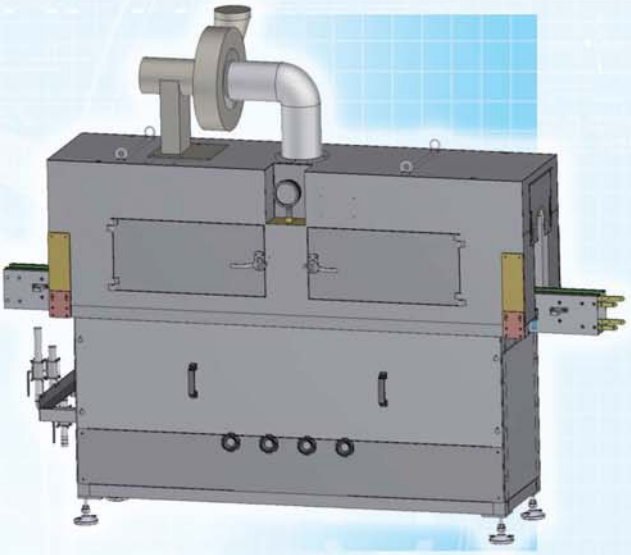

ST- 2180 Steam Shrink Tunnel

主機機械尺寸 Machine Dimensions...**1800L x 500W x 610H mm**
爐內尺寸 Tunnel Dimensions.....**1800L x 150W x 420H mm**
電源 Power Source .....**3P / 220V ~ 415V**
主機馬力 Main Motor.....**0.4 KW**
使用蒸汽壓力 Steam Pressure.....**0.5 ~ 3.5 kg/cm²**
蒸汽消耗量 Exhausted of Steam.....**250 ~ 350 kg/hr**



ST- 2280 Steam Shrink Tunnel

主機機械尺寸 Machine Dimensions...**2800L x 500W x 1000H mm**
爐內尺寸 Tunnel Dimensions.....**2800L x 150W x 420H mm**
電源 Power Source .....**3P / 220V ~ 415V**
主機馬力 Main Motor.....**0.75 KW**
使用蒸汽壓力 Steam Pressure.....**0.5 ~ 3.5 kg/cm²**
蒸汽消耗量 Exhausted of Steam.....**350 ~ 500 kg/hr**



Others 吹乾機 · 捲料機 · 自動放杯器 · 自動收杯器

Dryer Machine Sleeve Reel System, Cup Dispenser, Cup Accumulating Device

FS1 Plenty Sleeve reel System 多捲式接料機

主機機械尺寸 Machine Dimensions:.....**1680L x 1200W x 1900H mm**
電源 Power Source: .....**3P / 220V ~ 415V**
主機馬力 Main Motor: .....**1/2 HP**
空氣壓力 Air Pressure:.....**5 kg/cm2**
膜料紙管 Roll Inner Core Diameter: .....**10"**
膜料卷最大外徑 Sleeve Max. Diameter:..**Ø520 mm**



FS3 Double Sleeve Reel System 雙捲供料系統

主機機械尺寸 Machine Dimensions:.....**2070L x 600W x 1750H mm**
電源 Power Source: .....**3P / 220V ~ 415V**
主機馬力 Main Motor: **200W**
膜料紙管 Roll Inner Core Diameter: .....**Ø5" ~ Ø10"**
膜料卷最大外徑 Sleeve Max. Diameter:..**Ø500 mm**



Dryer Machine 吹乾機

吹乾本體尺寸 Dryer Body Dimensions: ...**1100L x 500W mm**
箱體尺寸 Main Body Dimensions: .....**1000L x 800W x 800H mm**
電源 Power Source: .....**3P / 220V ~ 415V**
主機馬力 Main Motor: .....**5.5 kW**



SACD-200 Cup Dispenser 自動放杯器

主機機械尺寸 Machine Dimension.....**900L x 1000W x 2300H mm**
電源 Power Source.....**3P / 220V ~ 415V**
生產速度 Production rate.....**250 BPM**
杯子直徑 Range of cup diameter.....**Ø55 ~ Ø95**
主機馬力 Main motor.....**0.5KW**



SACS-200 Cup Accumulating Device 自動收杯器

主機機械尺寸 Machine Dimension.....**1000L x 1000W x 1200H mm**
電源 Power Source.....**3P / 220V ~ 415V**
生產速度 Production rate.....**200 BPM**
杯子直徑 Range of cup diameter.....**Ø55 ~ Ø95**
主機馬力 Main motor.....**1KW**



PET/PVC/PP/PE/OPP/OPS

Shrinkable Colorful Label

彩色印刷收縮膜標籤



各式彩色印刷收縮標籤

Various printing for colorful shrinkable label

PVC / PET / OPS / OPP / PP / PE 收縮膜為廣泛運用包裝材料，適用於大多數包裝機械設備。可印製霧面及亮面收縮標籤，與各種容器都能緊密附著貼合，可耐水浸、耐冰溫、耐油侵透等而不脫落變色，又可做 360 度全面設計，精緻呈現產品特色，達到完美包裝需求。適用範圍：汽水、飲料、礦泉水、光碟片、食品、速食麵、文具用品等外包裝。

PVC, PET, OPS, OPP, PP, PE shrink films are popular materials and run on most packaging machinery. Adhere closely to print for mat with gross and shiny design by various containers and receptacles. Not fall off and change color when water-resistant, ice-resistant, and oil-resistant erosion etc. Can making 360 degree of overall design to achieve perfect packing requirement. Apply to packing with carbonated drink, beverages, mineral water, CD, foodstuff, instant noodle, and stationery, etc.

各式瓶身收縮標籤

Various shrinkable label for bottle body

因應包裝市場的多變性，引進全新的印刷設備，印製美觀實用的瓶身收縮標籤，對於方形容器、圓形容器、特殊形容器、都能緊密附著貼合，其優良之強韌度可預防瓶子爆破時的危險。適用範圍：汽水、飲料、礦泉水、食品等外包裝。

Lead in new printing machineries to apply artistic and practical shrink label on bottle. Can adhering closely with square, circle and peculiar receptacles. Excellent strength to prevent the damages from burst. Apply to packing with carbonated drink, beverages, mineral water, and foodstuff, etc.





文具類印刷收縮標籤

Shrinkable label for stationery printing

本公司全新自動化的印刷設備，讓精巧的小規格收縮標籤更為亮麗，透過純熟的加工技術，可讓合掌最小尺寸達 12 mm，適用範圍更廣泛，增加產品價值感。適用範圍：各種文具用品、各式鉛筆、膠水等小規格產品。

Automatically printing machinery to make shrink label on small size products. With proficient process skills to make smallest seamed dimension at 12mm. Apply more generally and raising for product's value. Application ranges: variously stationery, pencil, and glue, etc.

PP & POF 印刷收縮標籤

Shrinkable label for PP & POF printing

環保無毒的軟性包裝材料，廣泛應用在速食麵、食品、唱片、化妝品、日用品等。封口處強度高，抗撕裂性良好且收縮率大，可依各種需要印製，一次達到產品全面包裝之需求。

Has soft character, environmental protection and without poison. Generally apply to instant noodles, foodstuff, disc, cosmetics, and daily commodities, etc. Own a high strength at seal position, good laceration resistant and great shrink rate. Can be printing with variously requirements to reach overall packing of product needs.





OPP/珍珠膜彩印標籤

OPP/Colorful printing label for mat with gross design

亮麗雅致的標籤，採充填後使用熱熔膠粘貼，可提高瓶子使用率。抗張強度大，耐衝擊、抗油性、抗濕性，可配合高速生產線運轉。適用範圍：礦泉水、汽水、油品、果汁、乳品等食品外包裝。

Bottle recyclable by use hot melt glue to paste up after the filling process. High strength to resistant the spread, attack endure, oil-resistant, and wet-resistant for co-operate with high speed operating. Apply to mineral water, carbonated drink, oil class, juice, and milk class, etc.



收縮管/電池類印刷收縮標籤

Shrinkable label for Tube / Battery printing

各種規格的 PVC 收縮管，適用於竹桿、掃把及電池之外包裝。各式規格電池印刷標籤，可取代高成本的鐵皮印刷，配合 XYH- 250 型自動套標籤機，以自動化生產達到低成本高效率的經濟效益。

PVC shrinkable tube has various specifications. Apply to pack bamboo pole, broom and battery, etc. Battery label printing has various specifications, can replacing the high cost of iron sheet printing. XYH-250 Auto Shrink Sleeve Machine can achieve econmic benefits by low cost with high efficiency in automatic production.



PF 印刷收縮標籤

Shrinkable label for PE printing

本包裝膜符合環保概念無毒害，經強化處理具防水防潮的功能，可代替紙盒外包裝隨意提放，集合式包裝與 360 度彩色印刷，符合量販化要求，增進促銷效果。

Conform with environmental protection and without poison. Have waterproof and wet-resistant function by the strengthen process. Can free replace packing for paper box. Increase sales prompting by class package and colorful printing at 360 degree.



黏性收縮標籤


Adhesive shrinkable label

具黏性的收縮標籤，適用於各種杯麵及各式杯狀產品，標籤收縮後不脫落，可降低直接於杯身印刷的成本，自動化生產可搭配 XYL 系列全自動套標籤機進行自動化生產，增加產品價值，提高消費者購買慾。


Apply for miscellaneous noodle cups and any product with cup shape. Not fall off after label has shrunk. Directly decrease the printing cost of cup body. Production automatically to cooperating with XYL Auto Shrink Sleeve Machinery can increase the value and raising desire to purchase from consumers.

積層彩藝袋


Colorful Art - Laminated Bags




站立
夾鏈袋型式
Stand-up
with zipper




四邊
封袋型式
Box type




三面封
夾鏈袋型式
Three-side
sealed with
zipper



站立袋型式
Stand-up




合掌封袋型式
Center
sealed



夾邊合掌
封袋型式
V type with
center
sealed



四邊封
夾鏈袋型式
Flat bottom
gusseted
bag with
zipper



三面
封袋型式
Three-side
sealed

特性

Why we choose pouch bag/ Character/ Advantage

1. 阻隔水氣、氧氣、二氧化碳及氮氣，遮光及保香效果佳。
2. 包裝產品創新設計、特殊造型可增加產品價值感。
3. 廢棄物減少，達到環保效果。夾鏈式設計可重複使用且適度防潮。
4. 重包裝鋁箔袋其防潮性佳、韌性強，可減少產品輸送中破裂變形。

1. Good at blocking the water, O2, CO2, N in the air, and preserve the freshness of the product.
2. To add the extra-value on the product by packing in a innovated design with special shape pouches.
3. To be more environment-friendly, replace the disposable plastic bag by using reusable zip pouches with a favor in damp-poof.
4. The aluminum foil bag can provide a good effect on water-proof and offer a stronger structure to secure the heavy contents not getting broken during transportation.




冷凍台灣鯛魚片




黑橋牌
原味香腸
Chinese Sausage
中華豆腐
中華豆花
自然零
CHICKEN GRATIN
RICE IN CREAM


鹽酥雞餅
蚵仔煎
海苔塩
玉黍叔


石棹正露茶
黎山茶




To learn more about our locations around the world



Do you know what kinds of material would fit your product?

Contact our consultants!

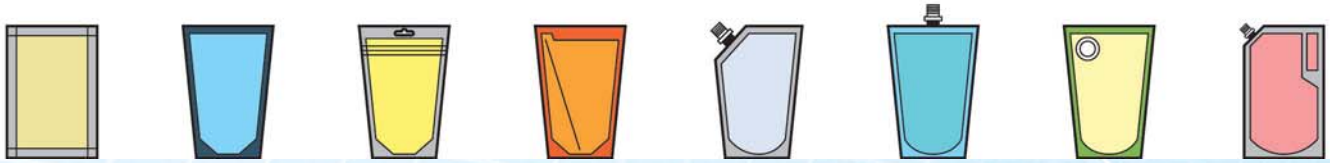



各種標籤套入法

Various label insertion methods operated by XYL series shrinkable label inserting machines



CAP SEALING TYPE
瓶口

OVERALL BOTTLE TYPE
整瓶型

FULL BODY LABELING TYPE
瓶身到底型

MIDDLE BODY LABELING TYPE
瓶身中間定位型

旭源包裝科技股份有限公司

PVC PE PET PP OPS OPP BOPP 熱收縮膜(管、套、袋)
彩色印刷收縮商標／全自動套標籤機
食品／工業及其他複合軟性包裝

http://www.xuyuanpack.com
E-mail: xuyuan@xuyuanpack.com

TAIWAN HEADQUARTER AND MANUFACTURE PLANT
305046 新竹縣新埔鎮巨埔里3鄰新龍路98巷33弄10號
No.10, Aly. 33 ,Ln. 98, Xinlong Rd., 3rd Neighborhood, Jupu Vil. Xinpu Township, Hsinchu County 305046, Taiwan(R.O.C.)
TEL：+886-3-5982727 FAX：+886-3-5982738

CHIAYI Fab.
622011 嘉義縣大林鎮大美里大埔美園區二路7號
No.7, Yuanqu 2nd Rd., Dapumei, Damei Village, Dalin Township, Chiayi County 622011, Taiwan(R.O.C.)
TEL：+886-5-2952888 FAX：+886-5-2952999

INDONESIA Site Office
TEL : +62-21-89904402 (REP) FAX : +62-21-89908323

SHANGHAI Site Office
TEL : +86-21-36536830 (REP) FAX : +86-21-36536827

USA Site Office
TEL : +01-501-492-3893 (REP)

BRAZIL Site Office
TEL : +55-14-3845-1965 (REP)

INDIA Site Office
TEL : +91-97691-10133